


## Gen 3 800 SERIES: 80A LEVEL 2

MODEL #	DESCRIPTION
JB3.0-801	Single Connector Charger
<b>CERTIFICATIONS</b>	
TUV Rheinland	
UL 2231-1, UL 2231-2, UL 2594	
<b>AC INPUT</b>	
Voltage: 208/240 VAC	
Breaker: Rating 100A	
Single Connector: 3 Wire (L1, L2 & G)	
<b>AC OUTPUT PER CONNECTOR</b>	
19.2 kW at 240VAC	
16.6 kW at 208VAC	
<b>OPERATING TEMPERATURE</b>	
- 25° C to +50° C	
- 13° F to +122° F	
<b>COMMUNICATIONS</b>	
Cellular	
<b>PROTOCOL</b>	
OCPP 1.6J	
<b>DIMENSIONS</b>	
71.25" Total Height with Pedestal	
36.5" Total Height w/out Pedestal	
16" Width Without Connectors	
12" Depth	
<b>CORD LENGTH</b>	
9 feet (standard)	
<b>CONNECTORS</b>	
SAE J1772 Type 1	
<b>ENCLOSURE</b>	
Type 3R Aluminum	
<b>OPTIONS</b>	
Wall Bracket	
Pedestal Mount	
Branded Door Graphics	
GFCI Outlet & Bike Lock Loop	
<b>USER INTERFACE</b>	
LED Indicators	
RFID Card Reader	



[sales@sparkev.ca](mailto:sales@sparkev.ca)  
(416) 931-7944  
[sparkev.ca](http://sparkev.ca)

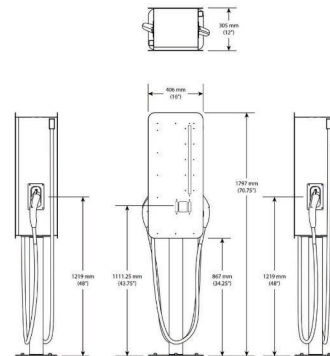